


PE수도관(응착식)

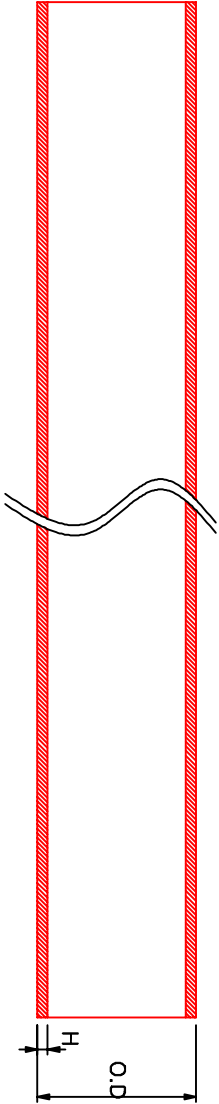

● PE PIPE 수도관 규격(KS M 3408-2)

호칭 (mm)	외 경(O.D mm)	원재료		공칭압력(bar)												
				SDR 9		SDR 11		SDR 13.6		SDR 17		SDR 21		SDR 26		
		PE80		PN 16		PN 12.5		PN 10		PN 8		PN 4		PN 3.2		
		PE100		PN 20		PN 16		PN 12.5		PN 10		PN 8		PN 6		
		길이(m)		관벽두께(mm)												
최소	최대	직관	Roll	최소	최대	최소	최대	최소	최대	최소	최대	최소	최대	최소	최대	
20	20.0	20.3	6.0	100.0	2.3	2.7	2.0	2.3								
25	25.0	25.3	6.0	120.0	3.0	3.4	2.3	2.7	2.0	2.3						
32	32.0	32.3	6.0	100.0	3.6	4.1	3.0	3.4	2.4	2.8	2.0	2.3				
40	40.0	40.4	6.0	100.0	4.5	5.1	3.7	4.2	3.0	3.5	2.4	2.8	2.0	2.3		
50	50.0	50.4	6.0	60.0	5.6	6.3	4.6	5.2	3.7	4.2	3.0	3.4	2.4	2.8	2.0	2.3
63	63.0	63.4	6.0	40.0	7.1	8.0	5.8	6.5	4.7	5.3	3.8	4.3	3.0	3.4	2.5	2.9
75	75.0	75.5	6.0	40.0	8.4	9.4	6.8	7.6	5.6	6.3	4.5	5.1	3.6	4.1	2.9	3.3
90	90.0	90.6	6.0	40.0	10.1	11.3	8.2	9.2	6.7	7.5	5.4	6.1	4.3	4.9	3.5	4.0
110	110.0	110.7	6.0		12.3	13.7	10.0	11.1	8.1	9.1	6.6	7.4	5.3	6.0	4.2	4.8
125	125.0	125.8	6.0		14.0	15.6	11.4	12.7	9.2	10.3	7.4	8.3	6.0	6.7	4.8	5.4
140	140.0	140.9	6.0		15.7	17.4	12.7	14.1	10.3	11.5	8.3	9.3	6.7	7.5	5.4	6.1
160	160.0	161.0	6.0		17.9	19.8	14.6	16.2	11.8	13.1	9.5	10.6	7.7	8.6	6.2	7.0
180	180.0	181.1	6.0		20.1	22.3	16.4	18.2	13.3	14.8	10.7	11.9	8.6	9.6	6.9	7.7
200	200.0	201.2	6.0		22.4	24.8	18.2	20.2	14.7	16.3	11.9	13.2	9.6	10.7	7.7	8.6
225	225.0	251.5	6.0		25.2	27.9	20.5	22.7	16.6	18.4	13.4	14.9	10.8	12.0	8.6	9.6
250	250.0	251.5	6.0		27.9	30.8	22.7	25.1	18.4	20.4	14.8	16.4	11.9	13.2	9.6	10.7
280	280.0	281.7	6.0		31.3	34.6	25.4	28.1	20.6	22.8	16.6	18.4	13.4	14.9	10.7	11.9
315	315.0	316.9	6.0		35.2	38.9	28.6	31.6	23.2	25.7	18.7	20.7	15.0	16.6	12.1	13.5
355	355.0	357.2	6.0		39.7	43.8	32.2	35.6	26.1	28.9	21.1	23.4	16.9	18.7	13.6	15.1
400	400.0	402.4	6.0		44.7	49.3	36.3	40.1	29.4	32.5	23.7	26.2	19.1	21.2	15.3	17.0
450	450.0	452.7	6.0		50.3	55.5	40.9	45.1	33.1	36.6	26.7	29.5	21.5	23.8	17.2	19.1
500	500.0	503.0	6.0		55.8	61.5	45.4	50.1	36.8	40.6	29.7	32.8	23.9	26.4	19.1	21.2
560	560.0	563.4	6.0				50.8	56.0	41.2	45.5	33.2	36.7	26.7	29.5	21.4	23.7
630	630.0	633.8	6.0				57.2	63.1	46.3	51.1	37.4	41.3	30.0	33.1	24.1	26.7
710	710.0	716.4	6.0						52.2	57.6	42.1	46.5	33.9	37.4	27.2	30.1
800	800.0	807.2	6.0						58.8	64.8	47.4	52.3	38.1	42.1	30.6	33.8

1. 관의 길이는 직관의 경우 6M, 9M 를 기본 치수로하여
인도, 인수 당사자간의 협의에 따라 변경할수 있다.
2. 관 길이의 허용치는 기본치수의 0 ~ +2%로 한다.

		DESIGNED BY: ILWOO CHECKED BY: ILWOO APPROVED BY: ILWOO FILE NAME: ILWOO PLAT SCALE: AS		DATE: CONTRACT NO.: SUBMITTED BY: ILWOO		PROJECT TITLE NONE		DRAWING TITLE PE수도관 규격 및 치수(KS M 3408-2)		DRAWING NUMBER SW - CHAMBER		REVISION NUMBER REV. 0	
--	--	---	--	---	--	------------------------------	--	--	--	---------------------------------------	--	----------------------------------	--